NH-100PX-Z-F

MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

- ☑ Up to 14l/min flow
- ☑ Up to 8m head
- ☑ Available with hose or threaded connections
- ☑ Compact
- ☑ Integrated Motor (110v or 230v)

SPECIFICATION

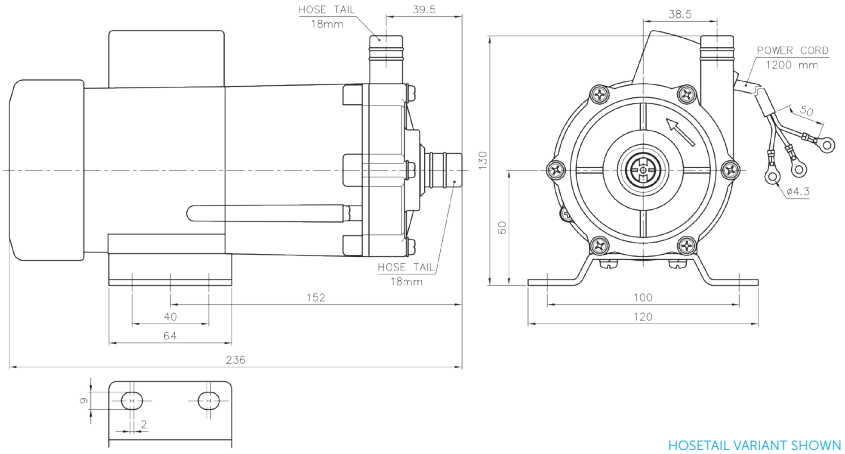

HOSETAIL VARIANT SHOWN

FEATURES

Temp:	Max 90°C
Pressure:	1.65 Bar (System)
Connections:	18mm or 3/4" Gas

WETTED MATERIALS

Front Cover:	ETFE
O Ring:	Viton
Impeller:	ETFE
Shaft:	Ceramic SiC
Thrust Washer:	Teflon Sic
Rear Housing:	ETFE

PERFORMANCE

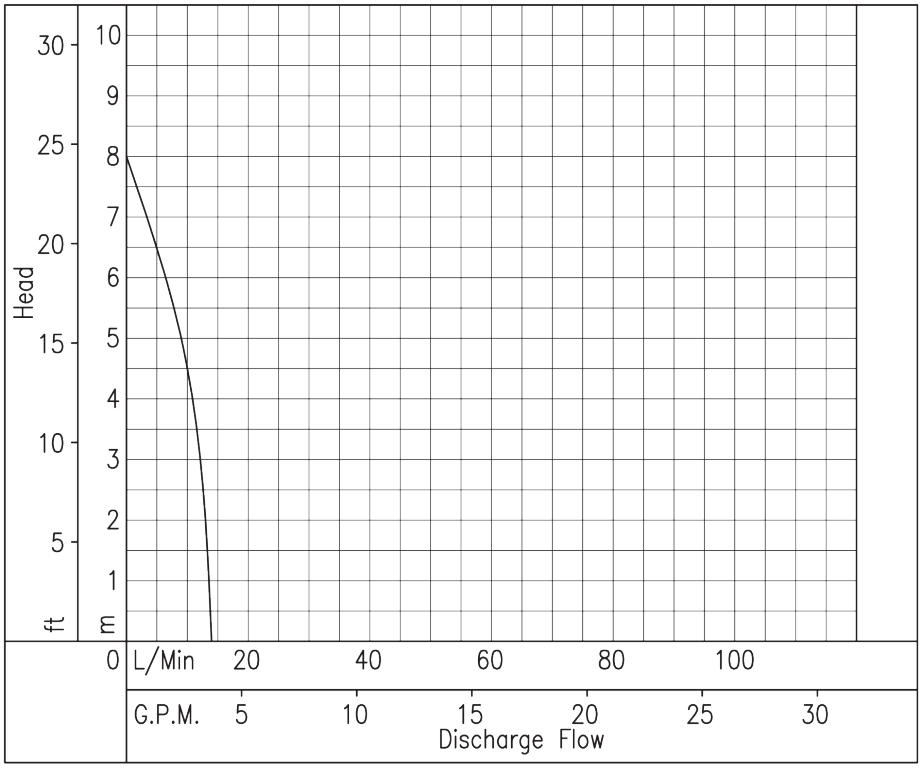

March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK
Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk