NH-250PW-C

MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

- ☑ Up to 230l/min flow
- ☑ Up to 9.8m head
- ☑ Available with Flange connections
- ☑ Cast Iron, ETFE Lined construction
- ☑ Long operating lifespan

SPECIFICATION

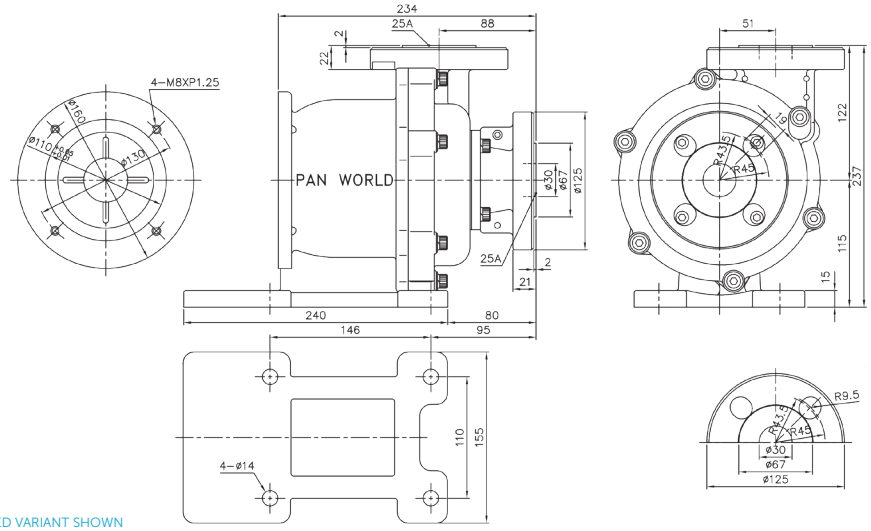

FLANGED VARIANT SHOWN

FEATURES

Temp:	Max 90°C
Pressure:	4.5 Bar (System)
Connections:	25A

WETTED MATERIALS

Front Cover:	Cast Iron / ETFE
O Ring:	Viton
Impeller:	ETFE
Shaft:	Ceramic
Thrust Washer:	Ceramic
Rear Housing:	ETFE

PERFORMANCE

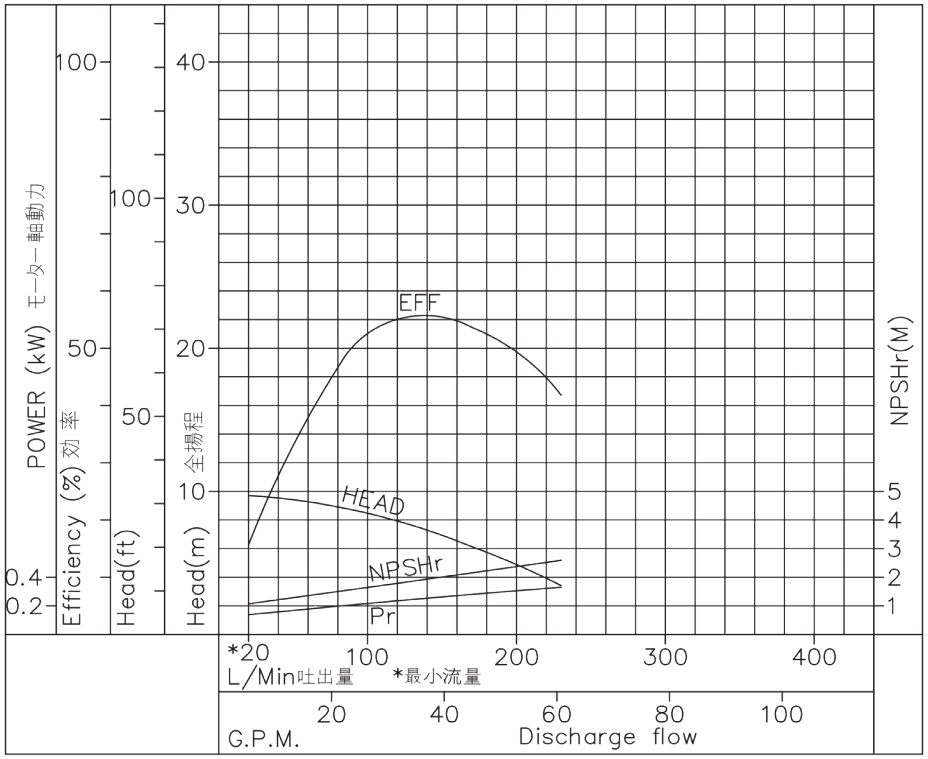

S.G: 1.2
IMPELLER SIZE
95MM

March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK
Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk