# NH-30PX-D-F

## MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

- ☑ Up to 22l/min flow
- ☑ Up to 3.6m head
- ☑ Available with hose or threaded connections
- ☑ Compact
- ☑ Integrated DC Motor (12V or 24V)

## SPECIFICATION

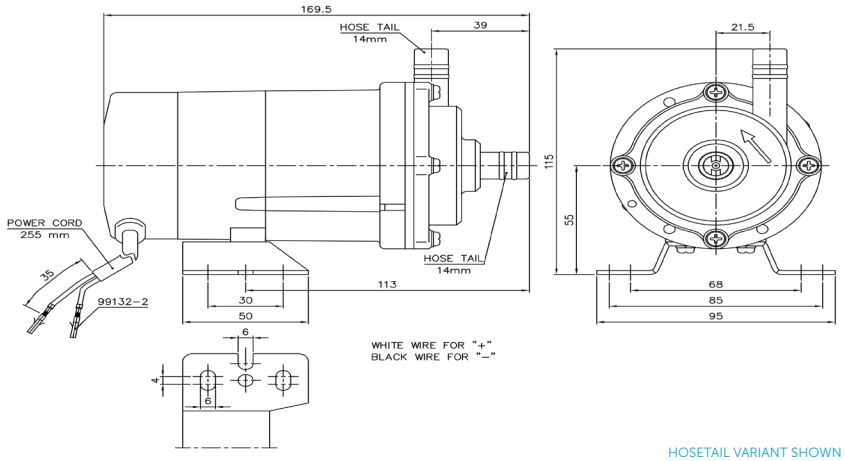


HOSETAIL VARIANT SHOWN

## FEATURES

| | |
|---|---|
| Temp: | Max 70°C |
| Pressure: | 0.53 Bar (System) |
| Connections: | 18mm or 3/4" Gas |

## WETTED MATERIALS

| | |
|---|---|
| Front Cover: | ETFE |
| O Ring: | Viton |
| Impeller: | ETFE |
| Shaft: | Ceramic SiC |
| Thrust Washer: | Teflon |
| Rear Housing: | ETFE |

## PERFORMANCE

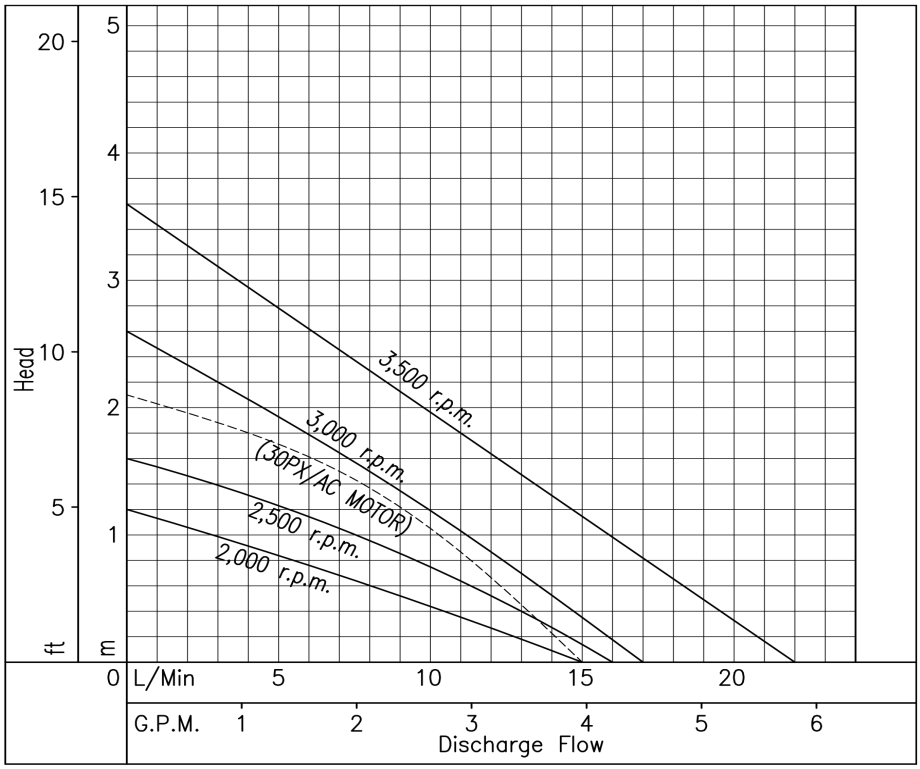


March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK
Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk