NH-351PW (50HZ)

MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

- ☑ Up to 135l/min flow
- ☑ Up to 22.7m head
- ☑ Available with hose, threaded or Flange connections
- ☑ Easy Maintenance
- ☑ Long operating lifespan

SPECIFICATION

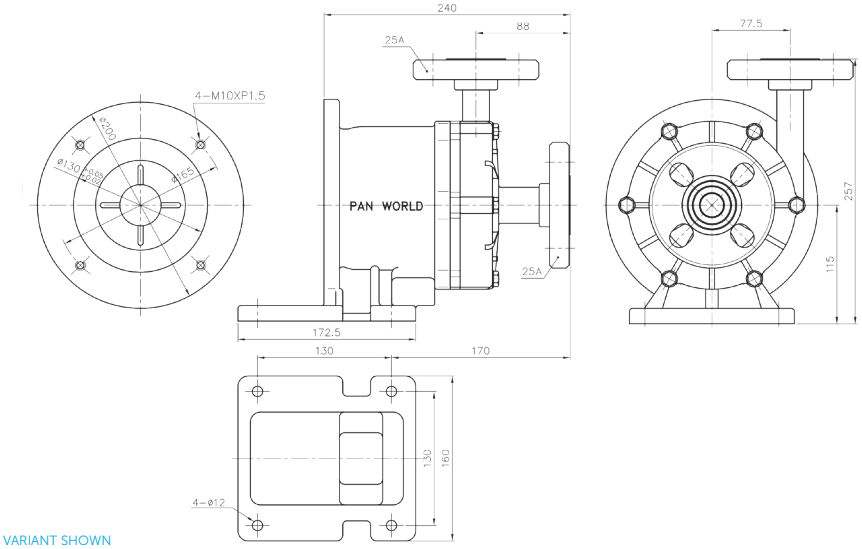

FLANGED VARIANT SHOWN

FEATURES

Temp:	Max 70°C
Pressure:	2.4 Bar (System)
Connections:	26mm Barb
	1" Gas Thread
	25A Flange

WETTED MATERIALS

Front Cover:	PPG
O Ring:	Viton
Impeller:	PPG
Shaft:	Ceramic
Thrust Washer:	Ceramic
Rear Housing:	PPG

PERFORMANCE

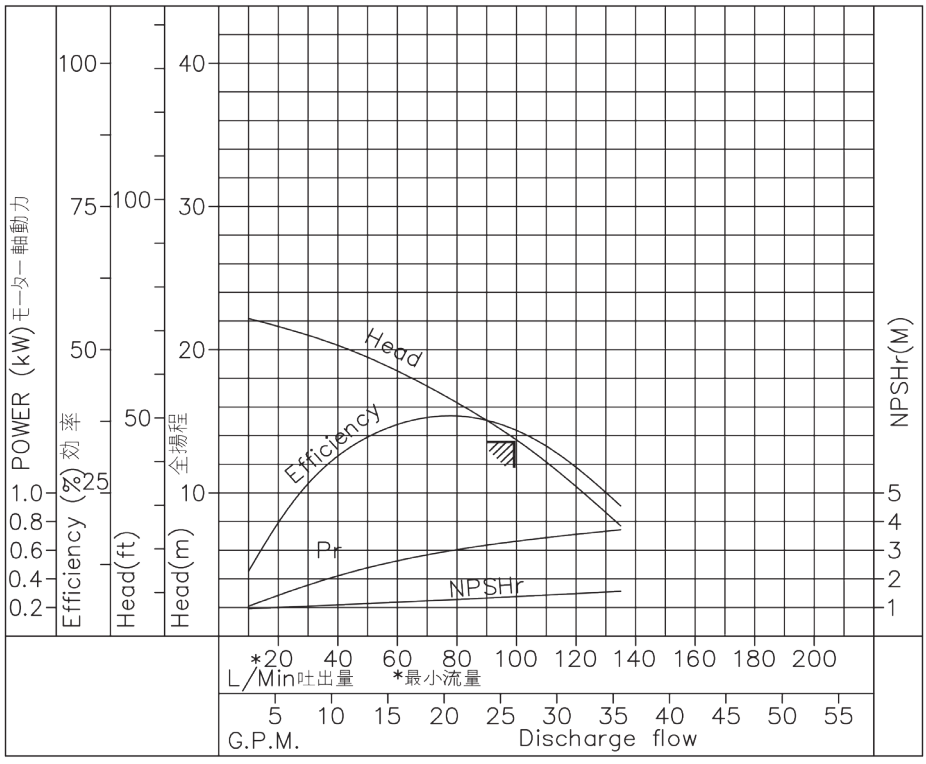

S.G: 1.0
IMPELLER SIZE
135MM

March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK
Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk