NH-401PW-K

MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

- ☑ Up to 260l/min flow
- ☑ Up to 14.6m head
- ☑ Available with Threaded or Flange connections
- ☑ Easy Maintenance
- ☑ Long operating lifespan

SPECIFICATION

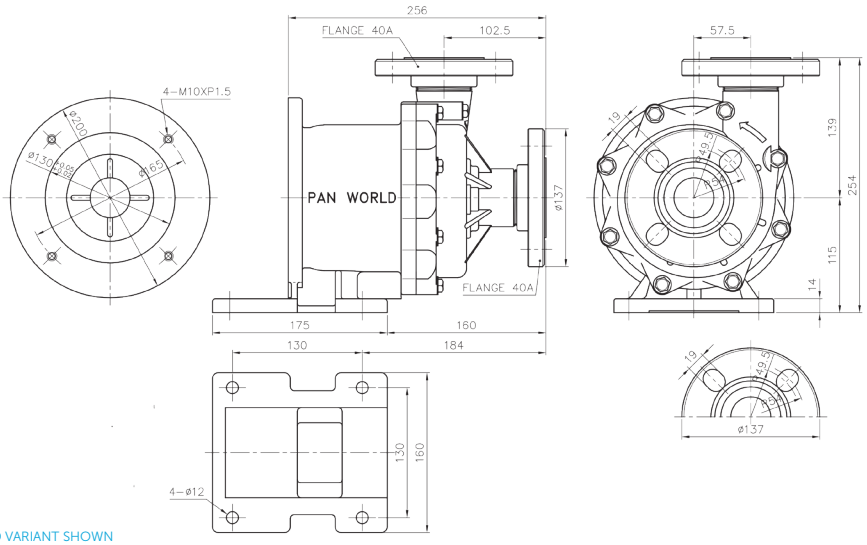

FLANGED VARIANT SHOWN

FEATURES

Temp:	Max 80°C
Pressure:	2 Bar (System)
Connections:	1 1/2" Gas Thread 40A Flange

WETTED MATERIALS

Front Cover:	PVDF
O Ring:	Viton
Impeller:	PVDF
Shaft:	Ceramic
Thrust Washer:	Ceramic
Rear Housing:	PVDF

PERFORMANCE

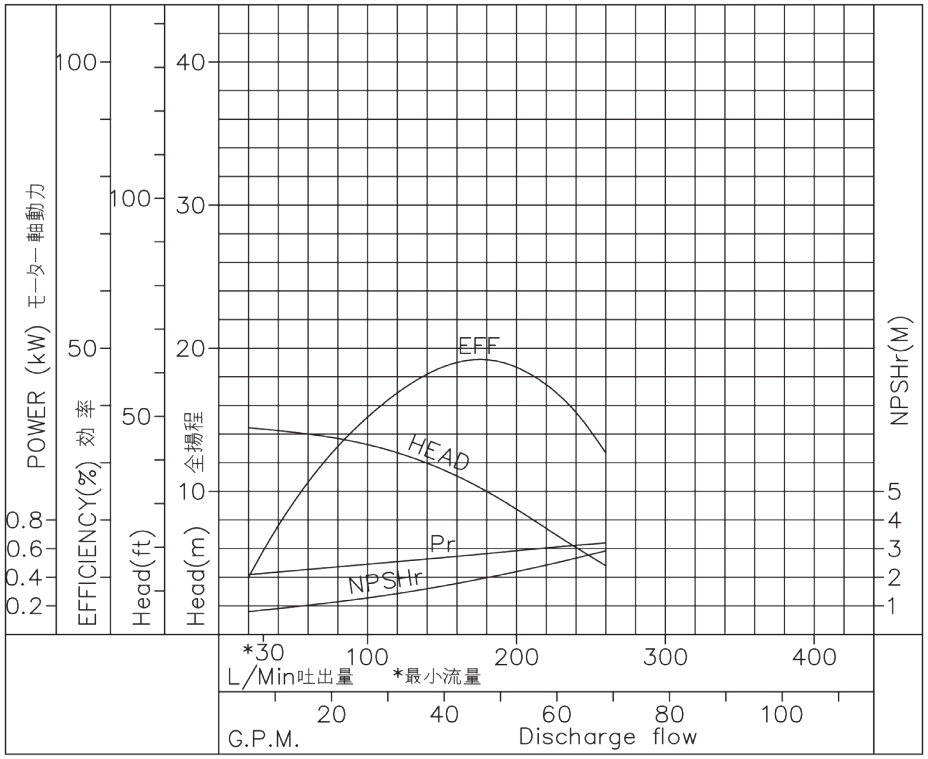

S.G: 1.2
IMPELLER SIZE
113MM

March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK
Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk