NH-403PW-N

MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

- ☑ Up to 570l/min flow
- ☑ Up to 26m head
- ☑ Available with Threaded or Flange connections
- ☑ Self Priming
- ☑ Easy Maintenance
- ☑ Long operating lifespan

SPECIFICATION

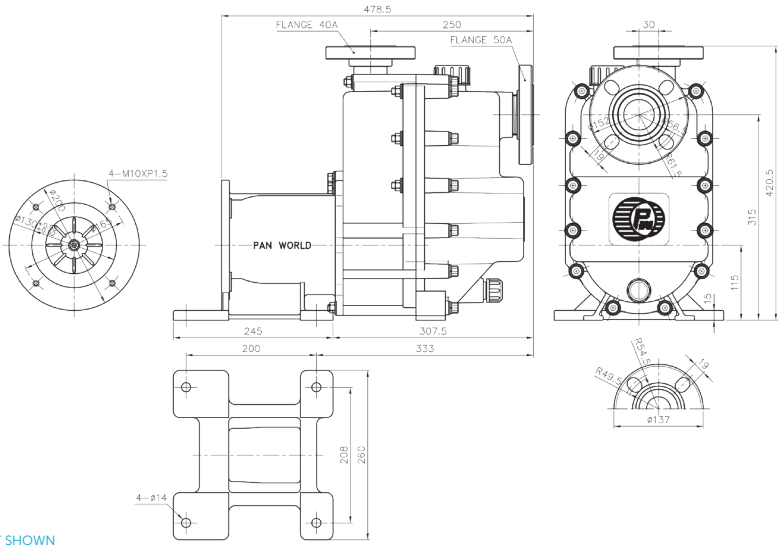

FLANGED VARIANT SHOWN

FEATURES

Temp:	Max 70°C
Self Priming Lift:	4m
Connections:	2" x 1 1/2" Gas 40A x 50A

WETTED MATERIALS

Front Cover:	PPG
O Ring:	Viton
Impeller:	PPG
Shaft:	Ceramic
Thrust Washer:	Ceramic
Rear Housing:	PPG

PERFORMANCE

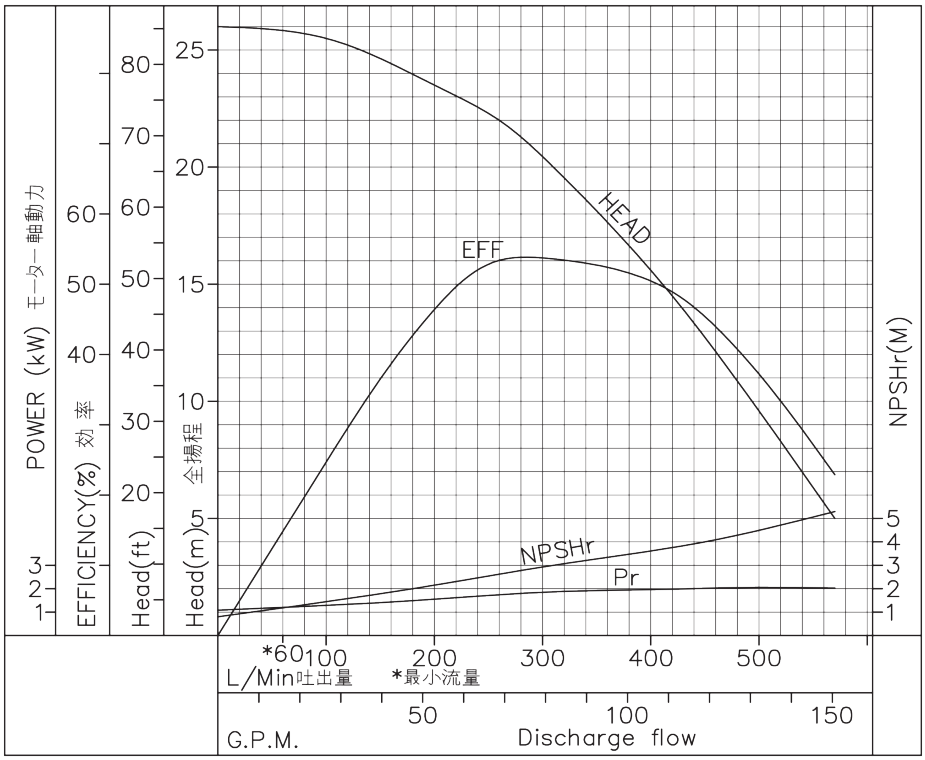

S.G: 1.2
IMPELLER SIZE
148MM

March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK
Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk