

TMCF01S-TMCF07S



MECHANICAL SEAL, ROTARY VANE

Fluid-o-Tech has combined its expertise in rotary vane pumps and magnetic drives to exclusively manufacture this series of pumps. The principle of the magnet drive is the driving force of the pole-to-pole alignment of two magnets





The driven magnet is fixed to the pump shaft, while the driving magnet is fixed to the motor shaft and closely located to the driven magnet. By means of magnet attraction, the pump rotates in response to motor shaft rotation.

- Longer service life
- No leaks or contamination
- Noiseless operation
- No contact between pump and motor shaft
- Higher efficiency

Available in 6 different displacements, with either a brass or stainless steel housing, AISI 303 rotor, carbon graphite pumping chamber and 3/8" GAS or NPT threaded ports, this pump line may be equipped, upon request, with standard or balanced built-in relief valve and NBR, EPDM, or Viton seals.

- Max system pressure: 18 Bar (260 PSI)
- Max temperature: 70°C (158°F)

SPECIFICATION

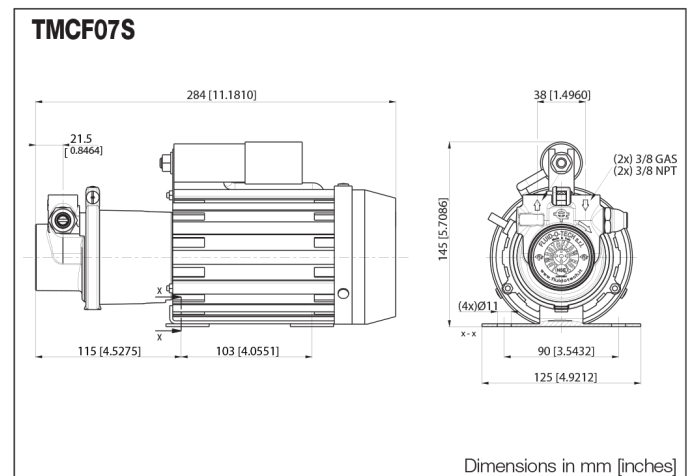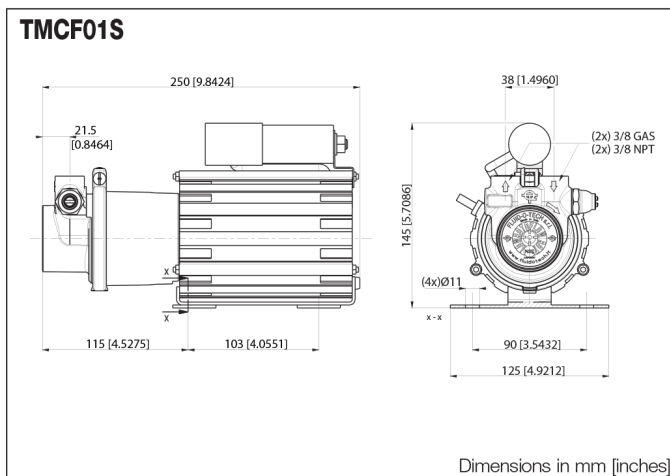


TMCF01S-TMCF07S



MECHANICALLY SEALED, ROTARY VANE


PERFORMANCE

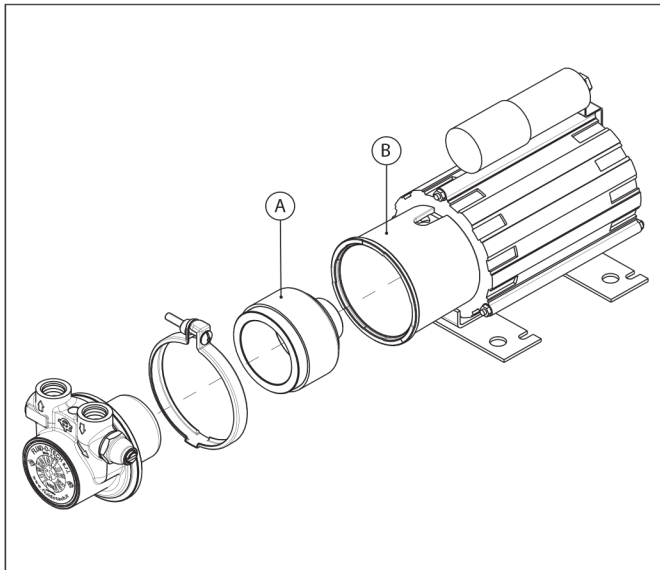

POS.	DESCRIPTION	CODE	
A	9 mm bore ferrite driving magnet	TMAF09S	TMAF09S
A+B	Motor with PPS adapter	TMCF01S	TMCF07S

MODEL	RELIEF VALVE	HOUSING	FIGURE
TMSS030	NO	STAINLESS STEEL	A-A
TMSS050			B-B
TMSS070			C-C
TMSS100			D-D
TMSS150			E-E
TMSS200			F-F
TMSS031	STANDARD		A-A
TMSS051			B-B
TMSS071			C-C
TMSS101			D-D
TMSS151			E-E
TMSS201			F-F
TMOT030	NO	BRASS	A-A
TMOT050			B-B
TMOT070			C-C
TMOT100			D-D
TMOT150			E-E
TMOT200			F-F
TMOT031	STANDARD		A-A
TMOT051			B-B
TMOT071			C-C
TMOT101			D-D
TMOT151			E-E
TMOT201			F-F
TMOT034	BALANCED	A-A	
TMOT054		B-B	
TMOT074		C-C	
TMOT104		D-D	
TMOT154		E-E	
TMOT204		F-F	

DRIVING UNIT	TMCF01S	TMCF07S
Code	6900128	6900338
Voltage (V)	230 AC	230 AC
Frequency (Hz)	50/60	50/60
Poles	2	2
Rated speed (rpm)	2850/3400	2870/3450
Current consumption (A)	0.75	0.8
Output power (W)	90	90
Pump motor weight (kg)	5.6	5.7
Duty	Intermittent	Continuous

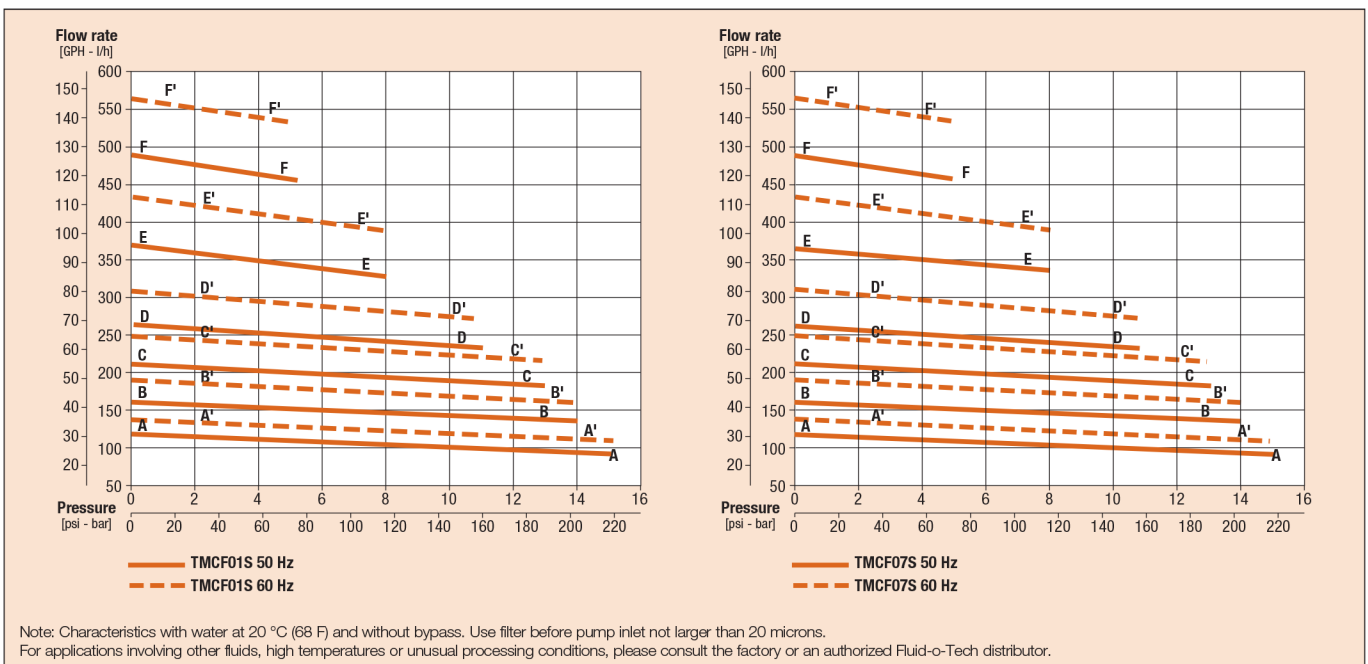

March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK

Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk